

LSV-08-3-L

二位三通电磁阀 锥阀型

说明 DESCRIPTION

A solenoid operated, 3-way, 2-position, poppet-type cartridge valve.

二位，三通，座阀式电磁阀

工作 OPERATION

When de-energized, the valve allows flow from ② to ① or from ① to ②, while blocking flow at ③. When energized, the valve allows flow from ② to ③ or from ③ to ②, while blocking flow at ①.


失电时，②和①通，与③不通；得电时，②和③通，与①不通

手控应急 Operation of Manual Override Option

To override, push button in to activate. To return to normal valve function, release button.

请用工具按下并按住按钮，②和③通，与①不通；松开按钮，返回常态。



SYMBOL




技术参数 SPECIFICATIONS

工作压力(Operating Pressure):	350bar
流量(Flow):	See PERFORMANCE CHARACTERISTIC graph.
内泄漏(Internal Leakage):	<1 drops/min.(滴/分) Our ideal leakage: 0.05 drops/min
温度(Temperature):	-40°F to +212°F(-40°C to +100°C)
线圈额定负载(Coil Duty Rating):	Continuous from 85% to 115% of nominal voltage(连续工作电压)
过滤(Filtration):	See page (参见) N-1
油液(Fluids):	Mineral-based fluids with viscosities of 7.4 to 420 cSt.(矿物油粘度)
插孔(Cavity):	08-3, See page M-1
阀块材料(Body Material):	Steel & Ductile iron rated to 350bar 钢和球铁允许使用最大压力350bar

压力 – 流量曲线 PRESSURE DROP VS.FLOW

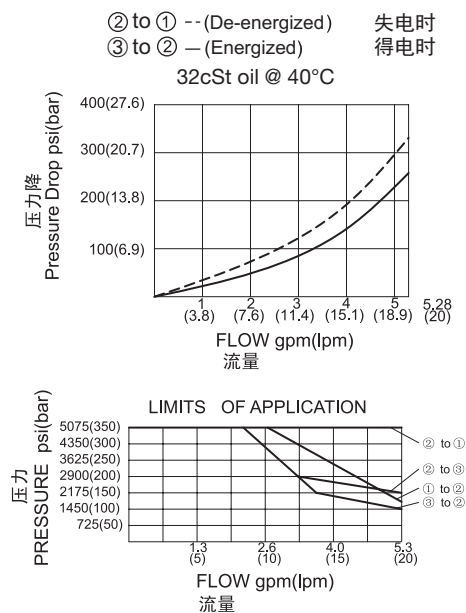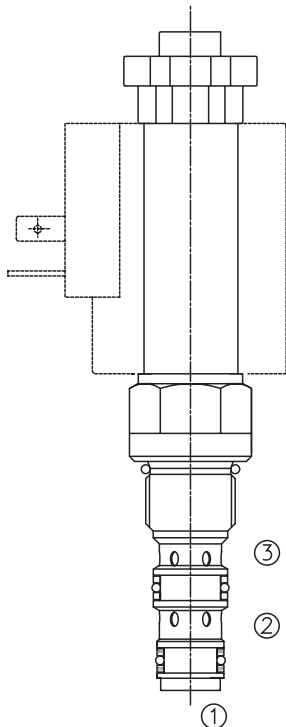

订货代号 TO ORDER



<p>1 功能 LSV= 电磁阀 Solenoid Valve</p>	<p>6 电压 Voltage 1=12 VDC 2=24 VDC 3=110 VAC 4=220 VAC</p>	<p>8 阀块油口 Body Porting 空白 Blank= 不带阀块 None 4T=SAE 4 6T=SAE 6 2G=G 1/4 3G=G 3/8</p>
<p>2 规格 Size 08=08 规格</p>	<p>7 线圈连接 Coil Connection D= Double Lead 双线 H= Hirschmann 三插 S= Single Lead 单线 ER= Deutsch Connector(Water-proof Coil) 德意志插座(防水线圈) B= Double Spade 双插</p>	<p>※ 阀块详见章节 K-2 其它螺纹油口也是可选择的 Other Porting Is Available</p>
<p>3 流道类型 Flow Path 3= 三通</p>		
<p>4 泄漏 L= 零泄漏 Zero Leakage</p>		
<p>5 手控应急 空白 Blank= 无手控应急 None M= 手控应急 Manual Override</p>		

安装尺寸 INSTALLATION DIMENSIONS

Coil Must Be Installed With Letter Up
安装线圈时，字母必须朝上。

Unit=Millimeters

